

Required Tool: (Not included)

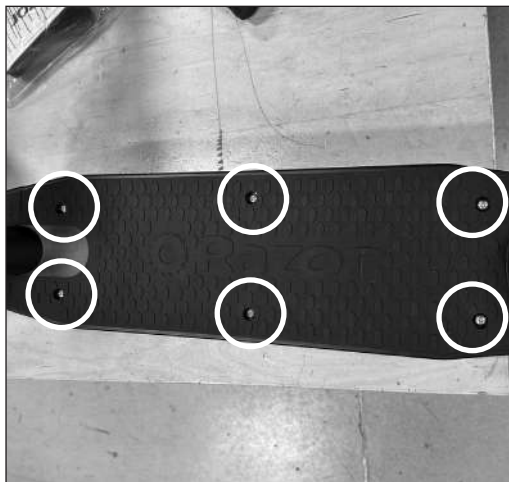
A. Phillips screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the six (6) screws from the deck. Remove deck and set aside.

**Step 2**

Locate and disconnect the battery connector from the charger port.



Step 3

Using a Phillips screwdriver, remove the two (2) screws that hold the charger port onto the frame and pull the charger port out.



Step 4

Reverse the steps to install the new charger port.

ATTENTION: Charge battery 6 hours before using.