



RAVEN
CHARGER PORT REPLACEMENT
PART NUMBER: W13112105106

Required Tools: (Not included)

- T25 driver
- Flat screwdriver
- Long needle pliers

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Using a T25 driver, remove the six (6) screws from the deck and pull the deck away from the unit.



Step 2

Locate and disconnect the battery connector from the controller.

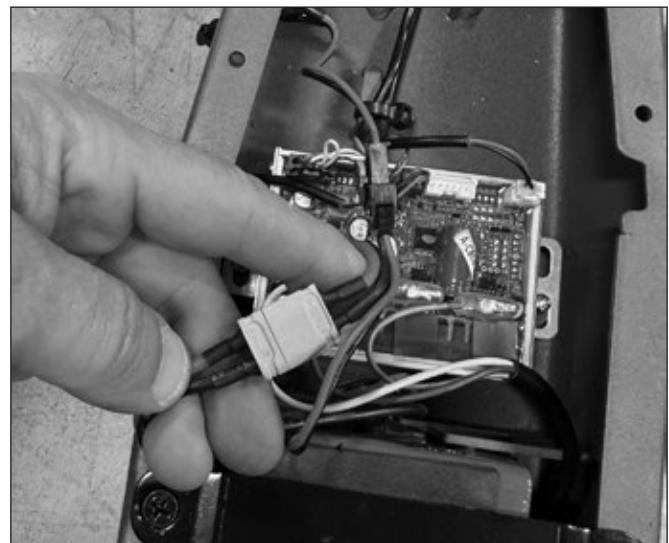


Step 3

Disconnect the charger port from the battery.




Step 4

Using a flat screwdriver, remove the plastic glue on the back of the charger port.

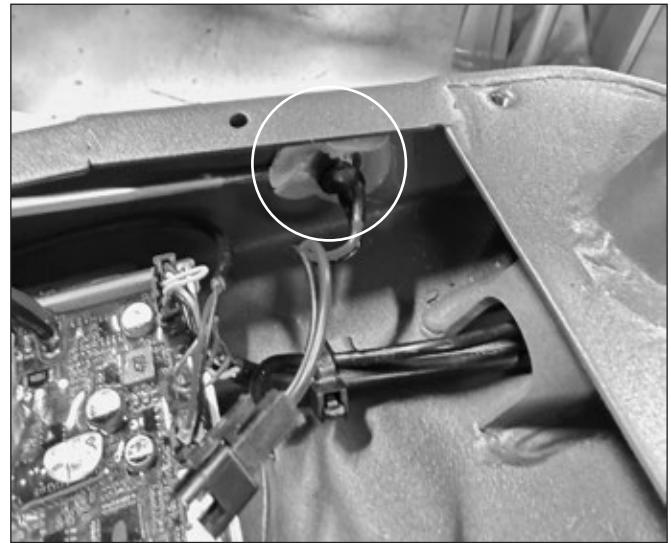

Step 5

Using long needle pliers, loosen and remove the lock nut from the charger port and remove it from the frame.

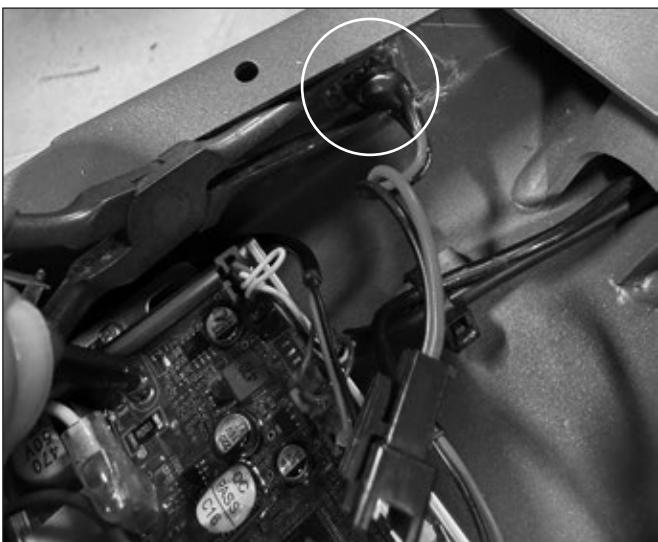

Step 6

Install the new charger port, then reverse steps 1 through 5 .

ATTENTION: Charge battery 5 hours before using.