

## **Required Tools: (Not included)**


- Phillips screwdriver
- 5 mm Allen wrench

# **WARNING**

A CAUTION: To avoid potential shock or other injury, turn power switch <u>OFF</u> and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

#### Step 1

Using a Phillips screwdriver, loosen and remove seven (7) screws from the battery cover on the side with the charger port.

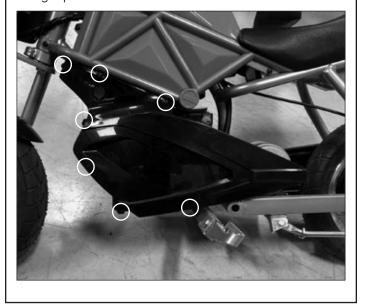

### Step 2

Pull the battery cover off and set aside.



## Step 3

Locate and disconnect the battery from the controller.



## Step 4

Using a 5 mm Allen wrench, loosen and remove two (2) hex bolts located on the bottom of the unit.



# Step 5

Remove the battery bracket from the battery.



# Step 6

Remove the two (2) batteries from the unit.



# Step 7

Install the new battery, then reverse steps 1 through 6.

ATTENTION: Charge battery 12 hours before using.