

**Required Tool: (Not included)**

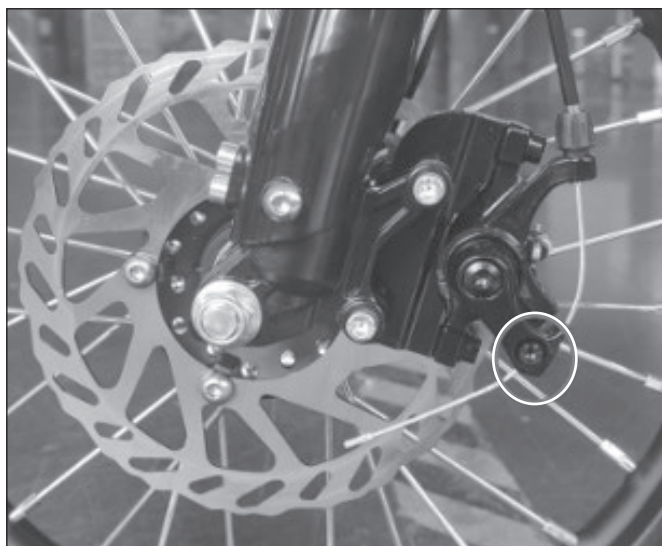
- 5 mm Allen wrench

**⚠ WARNING**

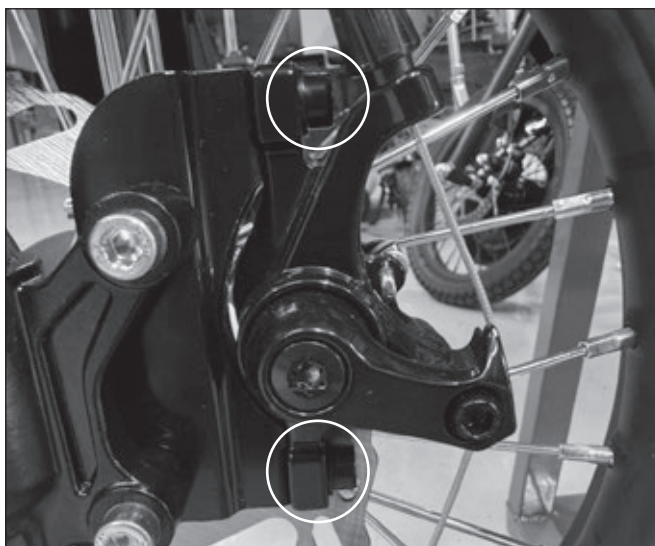
**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a 5 mm Allen wrench, loosen the rear anchor bolt.

**Step 2**

Using a 5 mm Allen wrench, remove the two (2) screws that lock the brake caliper. Remove the old caliper.

**Step 3**

Install the new brake caliper, then reverse steps 1 through 2.

**ATTENTION:** Charge battery 8 hours before using.